


DESCABEND PTS-20 Power

100,00 mm² - 2000,00 mm²

Flexible connectors

Application

The flexible connectors DESCABEND PTS-20 Power are suitable to all types of electrical connections, as connections in transformers, in generators, in switching devices, in the electroplating, in resistance welding machines, etc.

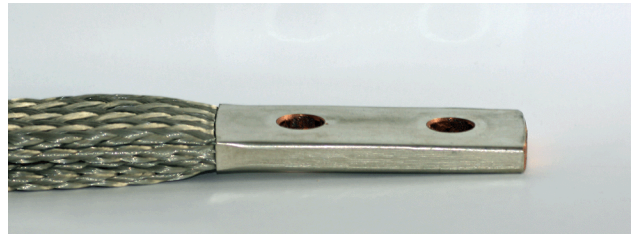

Construction

Flexible connectors made of tinned copper wires 0,20 mm, rectangular rolled
Solderless pressed tinned copper tube contact areas, not processed

Special Characteristics

The characteristics of these flexible connectors are a high power transmission by compact dimension, a high flexibility, they are extremely resistant to vibrations and expansions.

Part Number	Type	Section mm ²	Lenght mm	Thickness mm	Mounting paid mm	Current rating A	kg / pce
804126	PTS-20 Power	100	250	7,20	35 x 35	460	0.280
804146	PTS-20 Power	100	500	7,20	35 x 35	460	0.560
804168	PTS-20 Power	120	250	7,60	35 x 35	510	0.330
804188	PTS-20 Power	120	500	7,60	35 x 35	510	0.670
804210	PTS-20 Power	150	250	8,00	40 x 40	590	0.420
804230	PTS-20 Power	150	500	8,00	40 x 40	590	0.830
804252	PTS-20 Power	200	250	8,50	50 x 52	720	0.550
804272	PTS-20 Power	200	500	8,50	50 x 52	720	1.100
804298	PTS-20 Power	250	300	9,50	60 x 60	850	0.830
804314	PTS-20 Power	250	500	9,50	60 x 60	850	1.380
804340	PTS-20 Power	300	300	10,50	60 x 60	950	0.990
804348	PTS-20 Power	300	400	10,50	60 x 60	950	1.320
804382	PTS-20 Power	400	300	11,00	80 x 80	1100	1.320
804390	PTS-20 Power	400	400	11,00	80 x 80	1100	1.760
804432	PTS-20 Power	500	400	11,00	100 x 100	1250	2.200
804436	PTS-20 Power	500	450	11,00	100 x 100	1250	2.480
804474	PTS-20 Power	600	400	11,50	100 x 100	1500	2.640
804478	PTS-20 Power	600	450	11,50	100 x 100	1500	2.970
804516	PTS-20 Power	800	400	14,00	100 x 100	1800	3.520
804520	PTS-20 Power	800	450	14,00	100 x 100	1800	3.960
804562	PTS-20 Power	1000	450	17,00	100 x 100	2000	4.950
804566	PTS-20 Power	1000	500	17,00	100 x 100	2000	5.500
804604	PTS-20 Power	1200	450	18,50	120 x 120	2400	5.940
804608	PTS-20 Power	1200	500	18,50	120 x 120	2400	6.600
804646	PTS-20 Power	1500	450	19,00	150 x 150	2500	7.425
804650	PTS-20 Power	1500	500	19,00	150 x 150	2500	8.250
804688	PTS-20 Power	1800	450	20,00	150 x 150	2600	8.910
804692	PTS-20 Power	1800	500	20,00	150 x 150	2600	9.900
804730	PTS-20 Power	2000	450	22,00	150 x 150	2800	9.900
804734	PTS-20 Power	2000	500	22,00	150 x 150	2800	11.000

Standard packaging

1 piece