


DESCAFIL M72

0,50 mm – 0,80 mm

Solid wires PVC 70°C

Application

PVC isolated wire for wiring in communications, electrical and electronics equipments, etc..

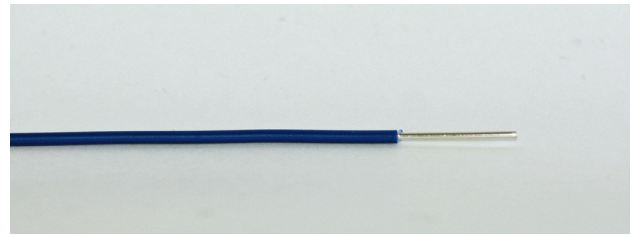

Construction

Solid tinned copper conductors
Insulation PVC

Technical Properties

Rated voltage U₀/U max. 250 V
Test voltage 2000 V
Temperature range - 5°C ... + 70°C
Minimum bending radius 6 x outer diameter

Cross section mm ²	Overall-Ø ca. mm	Copper kg/km	Weight kg/km
0,50	1.10	1.90	2.80
0,60	1.20	2.90	3.40
0,80	1.40	4.80	6.00

Packaging	Dimension
Spule 200 m	135 x 75 x Centre 60 mm
Spule 200 m	135 x 75 x Centre 60 mm
Spule 200 m	135 x 75 x Centre 60 mm

Colour code see next page

on require

in other versions and packaging

DESCAFIL M72

0,50 mm – 0,80 mm

Solid wires PVC 70°C

Colour code								
0,50 mm	black	light blue	green-yellow	brown	grey	dark blue	red	white
	152080	152081	152082	152083	152084	152085	152086	152087
	green	orange	violet	yellow	rose			
	152088	152089	152090	152091	152092			
0,60 mm	black	light blue	green-yellow	brown	grey	dark blue	red	white
	152100	152101	152102	152103	152104	152105	152106	152107
	green	orange	violet	yellow	rose	brown-white	yellow-white	
	152108	152109	152110	152111	152112	152114	152115	
0,80 mm	black	light blue	green-yellow	brown	grey	dark blue	red	white
	152120	152121	152122	152123	152124	152125	152126	152127
	green	orange	violet	yellow	rose	brown-white	grey-white	yellow-white
	152128	152129	152130	152131	152132	152133	152134	152135
	green-white							
	152136							

on require

in other versions and packaging