


DESCAFLEX H05RR-F

0,75 mm² - 2,50 mm²

Cables elastomeric 500 V

Application

Flexible cables for use in industrial, commercial and domestic premises, dry and humid rooms, etc..

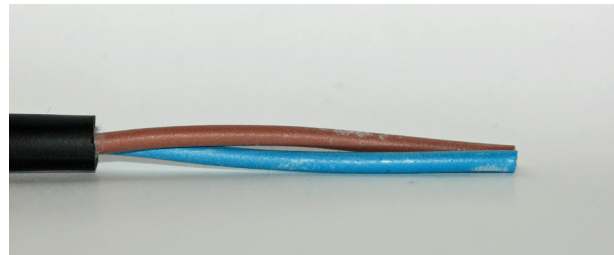

Construction

Flexible bare copper conductors, acc. to IEC 60228, class 5
EPR Insulation, coloured according to HD 308 S2
Sheath elastomeric, black

Technical Properties

Rated voltage U ₀ /U	300 / 500 V
Test voltage	2000 V
Insulation resistance	20 MΩm
Operating temperature	- 25°C ... + 60°C
- static installation	- 40°C ... + 60°C
Minimum bending radius	6 x cable diameter

Standards / Approvals

CENELEC HD 22.4 S3

Part Number	Type n x mm ²	Overall-Ø ca. mm	Copper kg/km	Weight kg/km
211290	2 x 0,75	6.40	14.40	61.00
211291	3 G 0,75	7.00	21.60	76.00
211292	4 G 0,75	7.60	28.80	92.00
211293	5 G 0,75	8.50	36.00	120.00
211294	2 x 1,00	6.80	19.20	72.00
211295	3 G 1,00	7.20	28.80	86.00
211296	4 G 1,00	7.80	38.40	100.00
211297	5 G 1,00	8.80	48.00	130.00

Part Number	Type n x mm ²	Overall-Ø ca. mm	Copper kg/km	Weight kg/km
211298	2 x 1,50	8.40	28.80	110.00
211299	3 G 1,50	8.90	43.20	130.00
211300	4 G 1,50	9.90	57.60	160.00
211301	5 G 1,50	11.00	72.00	200.00
211302	2 x 2,50	10.00	48.00	160.00
211303	3 G 2,50	11.00	72.00	190.00
211304	4 G 2,50	12.00	96.00	240.00
211305	5 G 2,50	13.50	120.00	300.00

Packaging

cut to desired length